




RUGGED PRODUCTS FOR HARSH ENVIRONMENTS

LOW PROFILE BAY LIGHT 100W

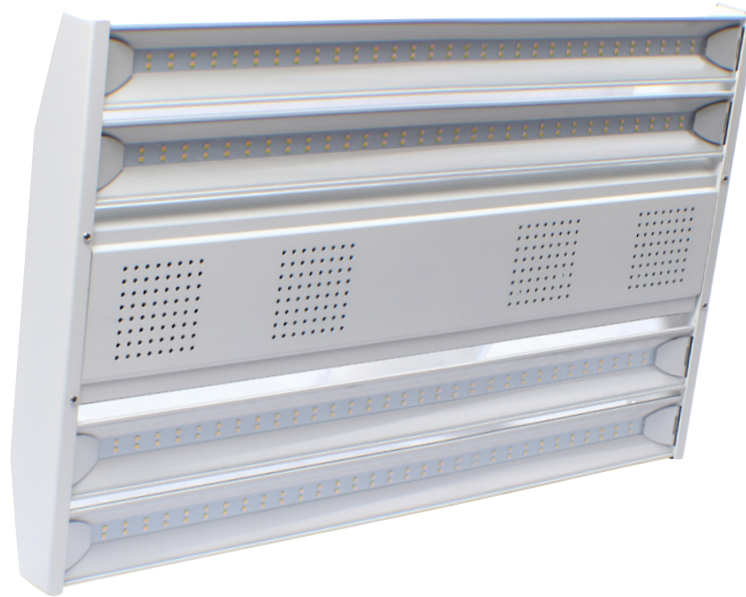

Perfect Light for: Low and Medium Bays

Product Name	BI-IF100W-600
Wattage	100W
Input Voltage	Ac 120-277V
Power Factor	>0.95
CCT	4000/5000/5700K
CRI	Ra80
Lens	Clear
Lumen	13,000lm
Beam Angle	120°
Dimmable	Optional
IP Grade	IP20
Lifespan	50,000H at 50°C Ambient Temp.
Working Temp.	-40°C - 50°C
Installing Method	Hanging Rope / Adjustable Bracket
Material	Aluminum + PC
Weight	4.8 Kg
Accessories	Occupancy / Daylight Sensor / DALI Dimming

Features:

Aluminum Heatsink
Philips Lumileds DS207 Chip
Philips XITANIUM Driver
Up to 130 lm/W
5 Years Warranty

Certificates & Report:

UL / DLC / CE / RoHS /
PSE / cUL (E474296)
LM-80 / IES

