



EXP-1319

The 1319 fixture withstands extreme temperatures, explosion and fire hazards, as well as flammable gases and vapours. This linear driverless LED fixture can withstand temperatures up to 100°C with CID1 and CIID2 classification ratings.

Ideal for high heat environments, petrochemical complexes, painting facilities, offshore platforms, oil and gas complexes, and more.

KEY FEATURES:

- **CID1 Group B, C, D**
- **CIID2 Group F, G**
- Temperature Rating of **-40°C ~ +100°C**
- **6KV Surge Protection Built-In**
- Various **Mounting Options**
- **Driverless Hazardous LED**
- Lifespan of **60,000 Hours**



SPECIFICATIONS

Luminous Efficacy	100lm/W
CCT	3000K, 5000K (Standard)
CRI	>Ra70 (5000K), Ra80 (3000K)
Beam Angle	>110°
Input Voltage	120V / 277V
IP Rating	IP68
Lifespan	60,000 Hours
Operating Temp.	-40°C ~ +100°C
Dimensions	656.5 mm x 105 mm
Warranty	65°C and Below - 5 Year Warranty 65°-85°C - 2 Year Warranty 86°-100°C - 1 Year Warranty
Certifications	UL, cUL
Classifications	CID1 Group B, C, D, CIID2 Group F, G

LUMENS	WATTAGE	EQUIVALENT
4,000lm	40W	120W





RUGGED PRODUCTS
FLEXIBLE - INNOVATIVE - SUSTAINABLE



BE-EXP-1319

Mounting Options

90° WALL MOUNT (WHT)

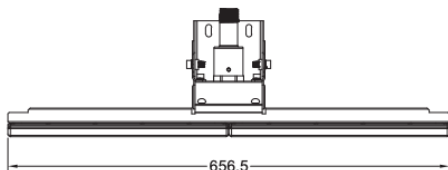

90° HANGING MOUNT (HHT)


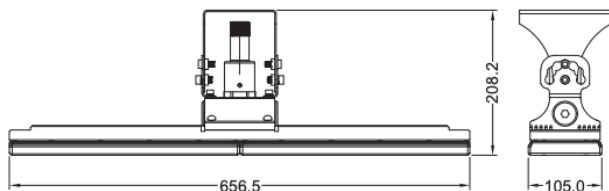


Fixture Ordering Matrix

Product Name	Wattage	Input Voltage	CCT	Classification	Options
BE-EXP-1319 (SMD)	40W	120V 277V	3000K 5000K (Standard)	CID1 / CIID2	WHT: <ul style="list-style-type: none">- Adjustable Wall/Hanging MountSC:<ul style="list-style-type: none">- Safety CableSGS:<ul style="list-style-type: none">- Surge Suppressor

Example: BE-EXP-1319 (SMD)-40W-120V-5000K-CID1-WHT

Dimensions & Shipping Information

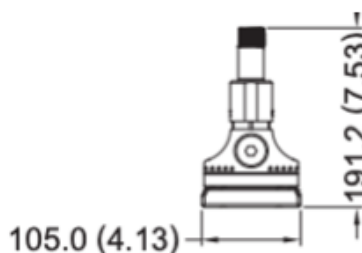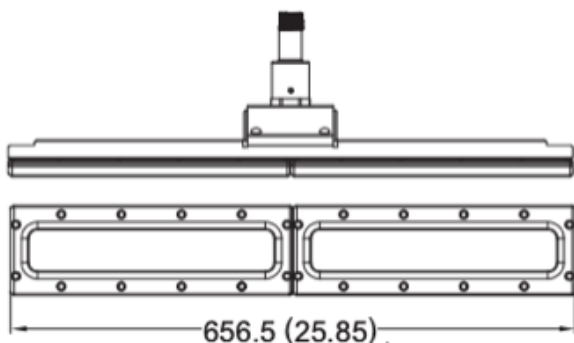

Dimension in Millimeters (inches)

Fixture Weight: 16.5 lbs

Weight w/Bracket: 17 lbs



Canada

Canadian Purchase Orders ship from our Canadian warehouse located at:

1178 Bighorn Ave
Pincher Creek, AB T0K 1W0
Canada



USA

USA Purchase Orders ship from our US warehouse located at:

910 S. Industrial Park Road
Shelby, MT 59474
USA



SUPPORT:

We sell exclusively through distributors. If you are a manufacturing plant, we are happy to work with you and your supplier of choice.

Our lead time on standard items is 5-7 business days.

For IES Files, lighting layouts or further questions, please contact one of our sales representatives.