


LINEAR FOOD PROCESSING LIGHT

The Linear Food Processing Light is designed specifically for food processing applications. This fixture meets or exceeds all NSF inspection zone requirements. The small, slender LED has an IP69K rating for heavy wash down applications or daily sanitation.

Ideal for high bay lighting anywhere the NSF standards are required including inspection areas, wash down zones, freezers and more.

KEY FEATURES:

- IP69K Highest Level of Protection Against Water and High-Pressure Washdown
- CRI 90 High Colour Rendering For Inspection Zones
- · Sandblasting Oxidation
- Built in 4kV Surge Protection
- Corrosion Resistant and Streamlined Body Design
- L70 Lifespan of 100,000 Hours

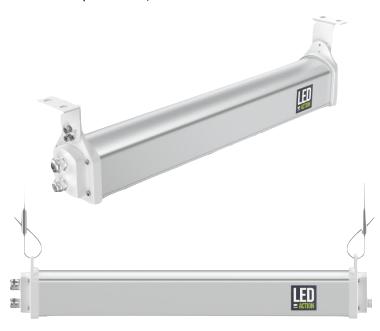











SPECIFICATIONS				
Luminous Efficacy	120lm/W			
ССТ	3000K, 4000K, 5000K (Standard)			
CRI	>Ra90			
Beam Angle	60x90°, 90x100° (Standard)			
Input Voltage	100-347 Vac			
IP Rating	IP69K			
L70 Lifespan	>100,000 Hours			
LED Driver	WeledPower			
Chipset	Nichia			
Operating Temp.	-30°C ~ +50°C			
Warranty	5 Year Warranty			
Certifications	NSF, cUL, UL, CE, RoHS, DLC			

LUMENS	LED WATTAGE	HID EQUIVALENT
14,400lm	120W	400W
8,400lm	70W	200W







DRIVER



100-347Vac Surge Protection: 4kV line-line, 4kV line-earth

CHIP SET





L70 Lifespan: 100,000 Hours **CRI:** 90

CCT: 3000K, 4000K, 5000K

LENS



ANTI-CORROSION

Acrylic Outside Cover Polycarbonate Inside Lens

MOUNTING OPTIONS

SUSPENSION MOUNT (STANDARD)






KEY SPECS

IP69K

CRI 90

NSF CERTIFIED

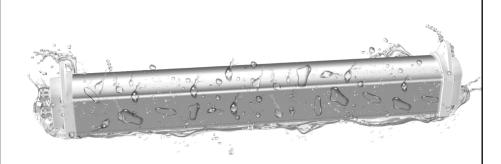

- · Wash Down Zones
- · Slaughter Areas
- Inspection Stations
- · Dry Storage
- Freezers
- Production Lines




Fixture Ordering Matrix							
Product Name	Wattage	Lens Degree	сст	Options			
BE-LHB19	70W 120W	D60*90 60x90 Degree Lens D90*100 90x100° Degree Lens	3000K 4000K 5000K (Standard)	CM Ceiling Mount SC Safety Cable SGS Surge Suppressor			

Example: BE-LHB19-120W-D90*100-5000K-SC

Dimensions & Shipping Information








Weight: 6 lbs

Dimensions: 24.7"x3.4"x4.4"

Shipping Weight: 8 lbs

Box Dimensions: 27.3"x9.8"x6.5"





120W

Weight: 9.5 lbs

Dimensions: 47.5"x3.4"x4.4"

Shipping Weight: 10.5 lbs **Box Dimensions**: 50.2"x9.8"x6.5"



Canadian Purchase Orders ship from our Canadian warehouse located at:

1178 Bighorn Ave Pincher Creek, AB T0K 1W0 Canada



USA Purchase Orders ship from our US warehouse located at:

910 S. Industrial Park Road Shelby, MT 59474 USA



SUPPORT:

We sell exclusively through distributors. If you are a manufacturing plant, we are happy to work with you and your supplier of choice.

Our lead time on standard items is 5-7 business days.

For IES Files, lighting layouts or further questions, please contact one of our sales representatives.