

HAZARDOUS H-SERIES

The H-Series fixture withstands explosion and fire hazards, as well as flammable gases and vapours. This hazardous location LED light has CID2, CIID1, CIID2, and CIII classification ratings.

Ideal for hazardous environments, petrochemical complexes, painting facilities, offshore platforms, oil and gas complexes, and more.



KEY FEATURES:

- · CID2 Groups A, B, C, D
- · CIID1 Groups E, F, F
- · CIID2 Groups F, G
- · CIII
- Various Mounting Options
- MeanWell Driver








SPECIFICATIONS					
Luminous Efficacy	140lm/W				
сст	3000K, 4000K, 5000K (Standard)				
CRI	>Ra 70				
Input Voltage	LV: 100-277Vac HV : 200-480Vac				
IP Rating	IP66				
Temp. Rating	-40°C ∼ +60°C				
L70 Lifespan	>50,000 Hours				
Warranty	5 Year Warranty				
Certifications	UL 1598A, cUL, DLC 5.1 Standard				
Classifications	CID2 Groups A, B, C, D CIID1 Groups E, F, G CIID2 Groups E, F, G				


CIII

LUMENS	WATTAGE	
11,200lm	80W	
8,400lm	60W	
5,600lm	40W	



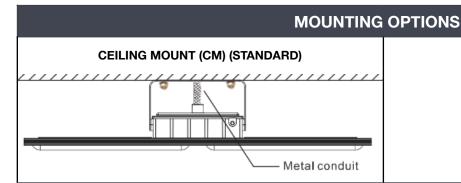

WALL MOUNT (WM) STANDARD)




FIXTURE ORDERING MATRIX

Product Name	Wattage	Input Voltage	сст	Classification	Options
ВЕ-ЕХР-Н	40W (2FT) 40W (4FT) 60W (4FT) 80W (4FT)	LV 120-277Vac (Standard) HV 200-480Vac	3000K 4000K 5000K (Standard)	CID2 / CIID1 / CIID2 / CIII	CM Ceiling Mount (Standard) WM Wall Mount (Standard)

Example: BE-EXP-H-40W(4FT)-LV-5000K-CID2-CM


DIMENSIONS & SHIPPING INFORMATION








40W (2FT) Weight: 20 lbs 27.20x15.75x11.42"







40W, 60W, 80W (4FT) Weight: 31 lbs 51.18x15.75x11.42"



Canadian Purchase Orders ship from our Canadian warehouse located at:

1178 Bighorn Ave Pincher Creek, AB T0K 1W0 Canada



USA Purchase Orders ship from our

910 S. Industrial Park Road Shelby, MT 59474 USA

US warehouse located at:



SUPPORT:

We sell exclusively through distributors. If you are a manufacturing plant, we are happy to work with you and your supplier of choice.

Our lead time on standard items is 5-7 business days.

For IES Files, lighting layouts or further questions, please contact one of our sales representatives.