


HIGH TEMP LINEAR HAZLOC

The 1319C fixture withstands extreme temperatures, explosion and fire hazards, as well as flammable gases and vapours. This linear driverless LED fixture can withstand temperatures up to 100°C with CID2 and CIID2 classification ratings.


Ideal for high heat environments, petrochemical complexes, painting facilities, offshore platforms, oil and gas complexes, and more.

KEY FEATURES:

- CID2 Group A, B, C, D
- CIID2 Group F, G
- CID1 Option Available (40W Only)
- Temp Rating of -40°C ~ +100°C / -40°F ~ +212°F
- 6KV Surge Protection Built-In
- Mounting Options
- Driverless Hazardous LED
- 6' Length UL SOOW 105°C 18AWG Cable
- Lifespan of 60,000 Hours

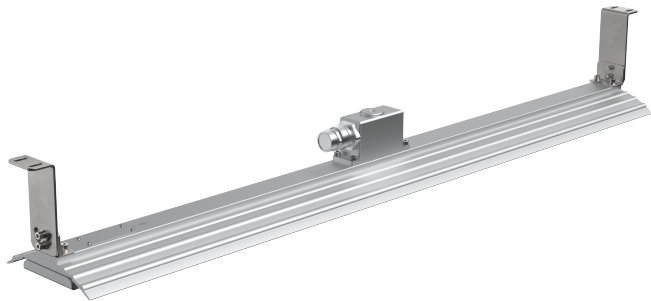

Scan QR Code Now For 2D/3D Drawings, IES Files, Spec Sheets & More

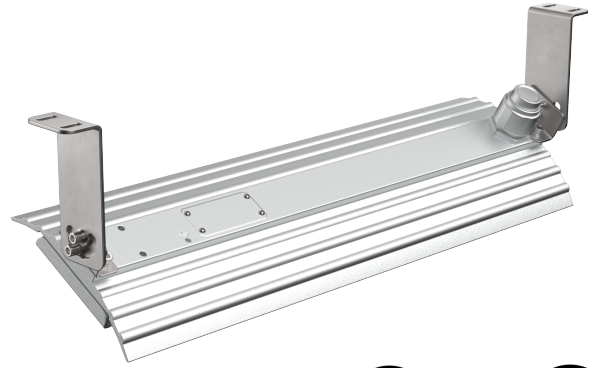

SPECIFICATIONS

Luminous Efficacy	120lm/W
CCT	3000K, 5000K (Standard)
CRI	>Ra70 (5000K), Ra80 (3000K)
Beam Angle	>110°
Input Voltage	120V / 277V Other Voltages Available
IP Rating	IP67
Lifespan	60,000 Hours
Operating Temp.	40W: -40°C to 100°C / -40°F to 212°F 60W & 80W: -40°C to 85°C / -40°F to 185°F 120W: -40°C to 65°C / -40°F to 149°F
Dimensions	2FT or 4FT
Warranty	65°C and Below - 5 Year Warranty 65°-85°C - 2 Year Warranty 86°-100°C - 1 Year Warranty
Certifications	UL, cUL
Classifications	CID2 Group A, B, C, D CIID2 Group F, G CID1 Available - 40W Only

LUMENS	WATTAGE
14,40 lm	120W
9,600 lm	80W
7,200 lm	60W
4,800 lm	40W


Mounting Options

ADJUSTABLE WALL/HANGING MOUNT (2FT)



WHT

ADJUSTABLE WALL/HANGING MOUNT (4FT)

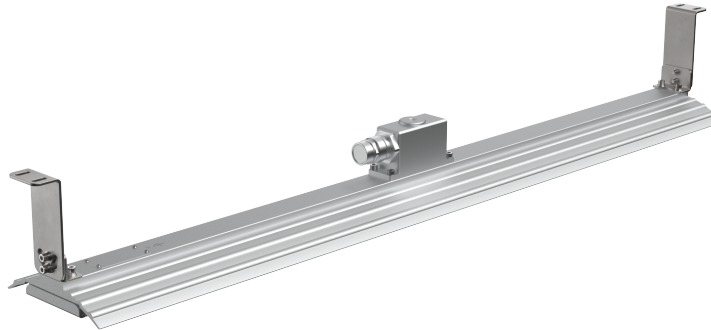

WHT

Fixture Ordering Matrix

Product Name	Size	Wattage	Input Voltage	CCT	Classification	Options
BE-EXP-1319C	2FT	40W 60W	120V 277V	5000K	CID2 / CIID2	WHT Adjustable Wall/Hanging Mount (Standard)
	4FT	40W 80W 120W	120V 277V Other Voltages Available	Other Options Available	CID1 (40W Only) Available Upon Request	SC Safety Cable SGS Surge Suppressor

Example: BE-EXP-1319C-2FT-40W-120V-CID2-5000K-WHT