



RUGGED PRODUCTS FOR HARSH ENVIRONMENTS

2026 PRODUCT CATALOG

V2 - JULY 2026



































SuperLux 3
Universal HAZLOC
Now Available
See Page 35

HAZLOC & INDUSTRIAL LED LIGHTING

www.LEDinAction.com

Avoid unnecessary interruptions and costly maintenance with the brightest and most durable LED fixtures on the market.

SOME OF OUR INDUSTRIAL CUSTOMERS

STEEL	PAPER	NSF FOOD	HAZLOC
 ArcelorMittal	 Domtar	 Cargill	 Constellium
 CLIFFS	 Georgia-Pacific	 FritoLay	 DUKE ENERGY
 Commercial Metals	 Graphic Packaging International	 INDIANA PACKERS CORPORATION	 ENERGY TRANSFER
 GERDAU	 INTERNATIONAL PAPER	 MAPLE LEAF	 GE VERNOVA
 NUCOR	 Kimberly-Clark	 Nestlé	 Imperial
 Steel Dynamics, Inc.	 West Fraser	 Pilgrim's	 SUNCOR ENERGY
 STELCO	 WestRock	 SOFINA	 TC Energy
 United States Steel	 Tyson	 VALE	 VALE
Overhead Cranes Industrial High Bay	Dryer Hood Lights High-Temp Lights (212°F)	IP69K Wash-Down Light CRI93 Sun-Quality Light	High Temp C1D1, C1D2 Explosion-Proof Fixtures

TRUSTED BY THE HEAVY INDUSTRIAL SECTOR

Proud Member of the National Association of Electrical Distributors



SOME OF OUR DISTRIBUTION PARTNERS



TABLE OF CONTENTS


ABOUT US



INDUSTRIAL CUSTOMERS & DISTRIBUTORS.....	1
HIGH-TEMPERATURE APPLICATIONS CHART	4
LED PRODUCTS	5
APPLICATIONS	7
FREQUENTLY ASKED QUESTIONS (FAQS)	9
LOCAL SALES REPRESENTATIVES.....	50

SPEC SHEETS

SUPERLUX



SL	11
SL - 600VAC.....	13
SLD - DRIVERLESS.....	15
SL2	17
SL3 (REPLACES CHB 100W-300W)	19
CHB 50W-90W	21

NSF WASHDOWN LIGHTING



HCP06	23
LHB19	25

HAZLOC LIGHTING



1319C.....	27
LN06	29
HH03	31
AREA LIGHT	33
EXP-SL3.....	35
RD05	37
TELESCOPING POLE MOUNT	39
CID1 LIGHTING.....	40
B-TOP	41
FL23	43

INDUSTRIAL LIGHTING













FL27	45
LHB09	47
RC-01.....	49

HIGH TEMPERATURE APPLICATIONS CHART

AMBIENT TEMPERATURE: CONSTANT HIGH TEMPERATURE




Temperature Ratings Only Apply To Specific Wattage

<p>100°C 212°F</p>	 BE-EXP-1319C-2FT-40W-CID2	 BE-EXP-1319C-40W-4FT-CID2	 BE-HH03-60W-CID2	 BE-EXP-HH33-120W-CID2
	<p>86°C-100°C - 1 Year Warranty</p>			
<p>85°C 185°F</p>	 BE-EXP-1319C-2FT-60W-CID2	 BE-HH03-80W-CID2	 BE-EXP-1319C-4FT-80W-CID2	 BE-SLD-200W
	<p>66°C-85°C - 2 Year Warranty</p>			
<p>65°C 149°F</p>	 BE-SL3-300W		 BE-SL2-450W	
	<p>65°C & Below - 5 Year Warranty</p>			

WATTAGE INCREASES →

TEMPERATURE BLASTS: SHORT BURSTS OF HIGH TEMPERATURE



ROBAX

120 Degree ROBAX Lens



Remote Mount Driver

- Extreme Temperature Upgrade for SuperLux
- Heat-Resistant Glass Ceramic Lens Up to **760°C**
- Not Affected by Substantial Temperature Shifts
- No Breakage Due to Thermal Shock or Stress

- Extreme Temperature Upgrade for SuperLux
- Remove the Power Supply & Mount Away From The Heat Source
- Cable Length Connection Up to 350 Feet
- Remote Mount & ROBAX Lens 1-Year Warranty up to **100°C/212°F**

KEY FEATURES

						
EXP-1319C-2FT	EXP-1319C-4FT	HH03	EXP-HH33	SL2	SL3	SLD
CID2	CID2	CID2	CID2	ROBAX Lens	ROBAX Lens	Up to 80°C/176°F
No Driver	No Driver	No Driver	No Driver	Remote Mount	Remote Mount	No Driver
40W/60W	40W/80W/120W	30W/40W/50W 60W/80W	120W	450W	300W	200W

LED LIGHTING PRODUCTS



SUPERLUX



SUPERLUX
BE-SL
96,000 Lumens
Page 11



SUPERLUX 600V
BE-SL-600V
600 Vac
Page 13



SUPERLUX DRIVERLESS
BE-SLD
Up to +80°C / +176°F
Page 15



SUPERLUX 2
BE-SL2
72,000 Lumens
Page 17



SUPERLUX 3
BE-SL3
14,000 - 48,000 Lumens
Page 19



LOW BAY
BE-CHB
7,000 - 12,600 Lumens
Page 21



NSF



FOOD PROCESSING LIGHT
BE-HCP06
IP69K Washdown Fixture
Page 23




LINEAR FOOD LIGHT
BE-LHB19
IP69K Washdown Fixture
Page 25



INDUSTRIAL




INDUSTRIAL FLOOD LIGHT
BE-FL27
Loop-In & Loop-Out Cable
Page 45

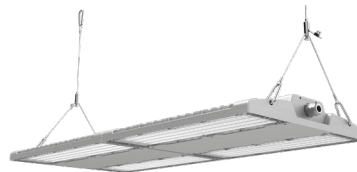

LINEAR HIGH BAY
BE-LHB09
Up to 56,000 Lumens
Page 47



INDUSTRIAL WORK LIGHT
BE-RC01
Rechargeable Work Light
Page 49

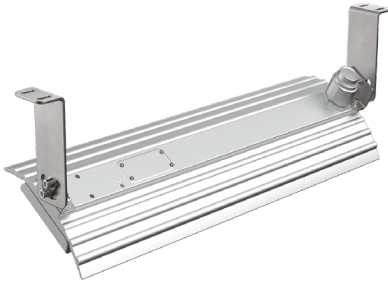


HIGH TEMP LINEAR

BE-EXP-1319C

Up to +100°C / +212°F

Page 27

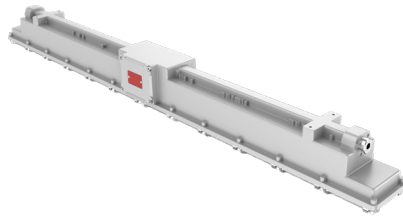

LINEAR HAZLOC LED

BE-EXP-LN06

Up to 15,000 Lumens

Page 29



HIGH TEMP HAZLOC

BE-HH03

Up to +100°C / +212°F

Page 31



HAZLOC AREA LIGHT

BE-EXP-HH33 / A / D

High Temp, CID2, CID1

Page 33




HAZLOC HIGH BAY

BE-EXP-SL3

CID2

Page 35



UNIVERSAL HAZLOC

BE-EXP-RD05

Up to 33,600 Lumens

Page 37



TELESCOPIC POLE

BE-EXP-TPM

Fits RD05 & MN03

Page 39



CID1 HAZLOC LIGHTS

BE-EXP

CID1 Ratings

Page 40



HAZLOC B-TOP

BE-EXP-B-TOP

Compatible Adapters

Page 41



HAZLOC FLOOD LED

BE-EXP-FL23

Up to 36,000 Lumens

Page 43

APPLICATIONS

NSF



HCP06

Page 23

LHB19

Page 25

HAZLOC



LINEAR (1319C, LN06)

Page 27 & 29

ROUND (HH03, SL3, RD05)

Page 31, 35, & 37

AREA (HH33, A, D)

Page 33

600V (SL3)

Page 35

TELESCOPIC POLE

Page 39

CID1

Page 40

RETROFIT (BTOP)

Page 41

FLOOD (FL23)

Page 43

FLOOD / MAST



SL

Page 11

SL2

Page 17

SL3

Page 19

FL23

Page 43

FL27

Page 45

HIGH BAY / LOW BAY



SL Page 11

SL2 Page 17

SL3 Page 19

CHB Page 21

RD05 Page 37

CRANE



SL Page 11

SL2 Page 17

SL3 Page 19

HIGH TEMP



SLD Page 15

1319C Page 27

HH03 Page 31

HH33 Page 33

LINEAR



LHB19 Page 25

1319C Page 27

LN06 Page 29

LHB09 Page 47

FREQUENTLY ASKED QUESTIONS

THROUGH PARTNERSHIPS WITH PEOPLE, WE CREATE INNOVATIVE AND RUGGED LIGHTING SOLUTIONS BUILT TO LAST.

HOW LONG HAVE WE BEEN IN BUSINESS?

Since 2008, LED in Action has provided customizable solutions in the industrial market for some of the toughest environments in North America. The experience gained by providing solutions to the heavy industrial sectors has elevated LED in Action to be a trustworthy partner. Our rugged products are currently distributed through most national distributors, as well as local distributors throughout Canada and the United States.

WHERE ARE WE LOCATED?

Our head office and shipping facilities are located in Pincher Creek, Alberta, Canada. We have a stocking and shipping facility in Shelby, Montana, USA. Our sales team is located throughout both Canada and the United States. We manufacture and assemble our products in China and Taiwan.

DO WE OFFER A WARRANTY?

Our fixtures have a high success rate that is proven to last in some of the world's harshest environments. For this reason, we are confident in standing behind our fixtures and offer one of the best warranties in the industry. Our lighting fixtures come with a standard completely hassle-free 5-year unlimited warranty.




WHAT INDUSTRIES DO WE SERVE?

Since 2008, our company has been providing industrial LED lighting solutions for harsh environments found in heavy industrial industries such as steel making, mining, oil & gas, paper, power plants, glass factories, and many other manufacturing facilities.

WHAT APPLICATIONS DO WE PROVIDE LIGHTING FOR?

Our lighting has proven to last and outperform in unique applications. Our lights can be found in high-temperature applications (hot mills, furnace rooms, dryer hoods, and cooling beds), overhead travelling cranes (heavy vibration and voltage spikes), food-grade applications (inspection zones and washdown zones), high ceilings (60 feet, 100 feet, and 150 feet), and hazardous locations where explosion-proof products are necessary.

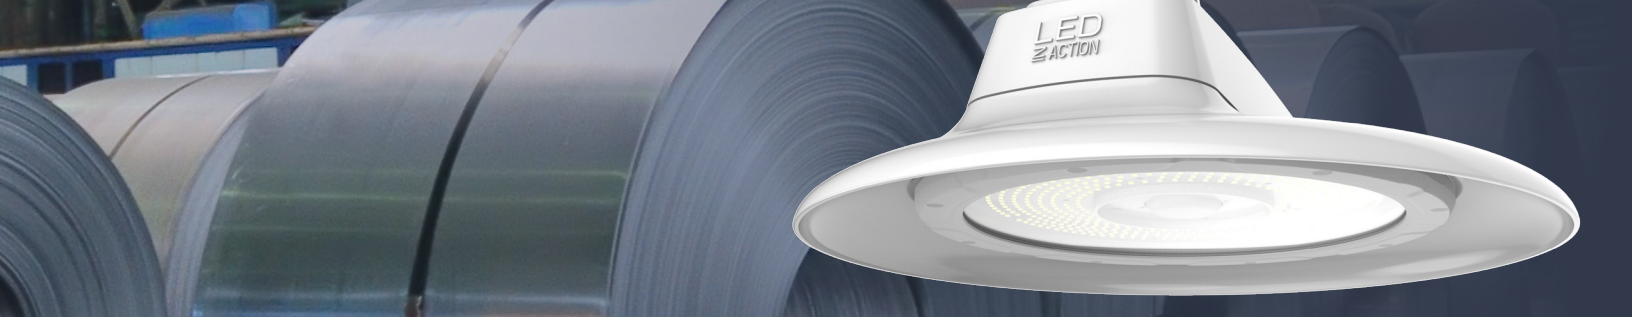

WHAT'S UNIQUE ABOUT OUR LED LIGHTING?

The secret to long-lasting LED lighting is in the quality of the components within the fixtures. Our LED light fixtures have less than a 1% failure rate. They perform successfully 99% of the time. We only source the best quality components from top brands around the world. We only use the best industrial grade drivers and chips while offering upgrades such as ROBAX glass (up to 760°C temperature rating), heavy-duty custom-made bracket options, surge suppressors, and safety cables. Quality components ensure long-lasting products and a quicker return on investment for our customers.



HOW CAN YOU BUY OUR PRODUCTS?

We sell our products through electrical distribution branches. If you are a manufacturing plant, we are happy to work with you and your supplier of choice to find the best LED lighting solution for your application. If you're a distributor, there's a good chance you already have our vendor information in your system either under *LED in Action* or *Back To Earth Energy, Inc.* We value our distribution partners and price protect any deal brought to us.



OUR LED LIGHTING FIXTURES

OTHER LIGHTING FIXTURES

UNIVERSAL INDUSTRIAL LED LIGHT

96,000 LM


SUPERLUX - BE-SL

The most compact 1000 watt HID equivalent on the market! At only 32 lbs & up to 96,000lm, the SL can deliver ample lumens up to 130' mounting heights. Using only the best quality components proven to last in heavy industrial plants since 2008. Install it anywhere with our universal mounting options including overhead cranes, high bay, flood/area lighting, and outdoor pole/mast lighting.

Ideal for harsh environments found at heavy industrial plants in North America!

KEY FEATURES:

- **96,000 Lumens & 160 lm/W**
- Industry Leading 20kA Surge Protection (Comes Pre-Installed on 100V-480V models)
- **Easy Installation:** Only 32 pounds Including the 347V, 480V Model
- **Easy Access Driver Box with 6' External Pigtail**
- **IP66 & Universal Mounting Options** For Any Industrial Application Inside & Out At Your Facility

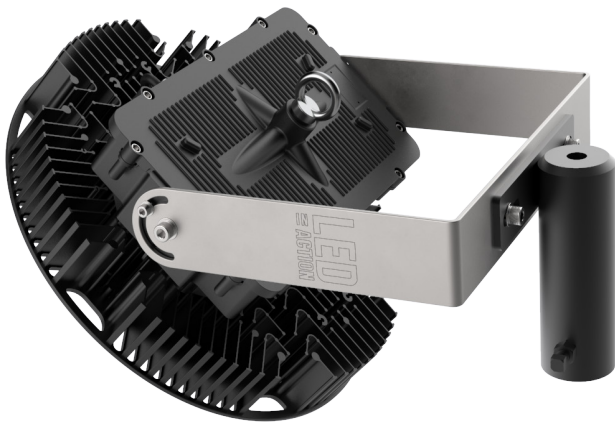

Scan QR Code Now For 2D/3D Drawings, IES Files, Spec Sheets & More



SPECIFICATIONS

Luminous Efficacy	160 lm/W
CCT	5000K, Other Options Available
CRI	>Ra 70
Beam Angle	30°, 60°, 90°, 120° (Standard)
Input Voltage	LV: 100-277Vac (250Vdc) HV: 277-480Vac
IP Rating	IP66
L70 Lifespan	L90 >54,000 Hours @ 85°C
LED Driver	Inventronics
Chipset	Seoul
Operating Temp.	-40°C ~ +65°C / -40°F ~ +149°F
Warranty	5 Year Warranty
Certifications	DLC, ETL, UL, cUL

LUMENS	LED WATTAGE
96,000 lm	600W

MOUNTING OPTIONS

HIGH BAY	AREA/FLOOD LIGHT	MAST LIGHT	CRANE LIGHT
			
LOOP HANGING (STANDARD)	BRACKET 24	BRACKET 24 + BRACKET 07 (SLIP FITTER)	BRACKET 24
FEMALE 3/4" NPT LID	HOOK	90° ALU SHADE	VISOR
			
NPT	HK	90ALU	VISOR

FIXTURE ORDERING MATRIX

Product Name	Wattage	Lens Degree	Input Voltage	CCT	Options
BE-SL	600W	D30 D60 D90 D120 (Standard) D120HT (High Temp ROBAX Glass)	LV 100-277Vac HV 277-480Vac	5000K Other Options Available	07 Slip Fitter 24 Adjustable Bracket HK Hook NPT Female 3/4" NPT Lid 90ALU 90° Aluminum Shade VISOR Visor SC (Included) Safety Cable SGS (Included) 20kA Surge Suppressor RM Remote Mount Driver

Example: BE-SL-600W-D120-LV-5000K-24-SC-SGS

UNIVERSAL INDUSTRIAL LED LIGHT

600 VAC

600VAC - SL

The most compact 1000 watt HID equivalent on the market! At 96,000lm the 600V SuperLux series can deliver ample lumens up to 130' mounting heights. Using only the best quality components proven to last in heavy industrial plants since 2008. Install it anywhere with our universal mounting options including overhead cranes, high bay, flood/area lighting, and outdoor pole/mast lighting.

Ideal for harsh environments found at heavy industrial plants in North America!

KEY FEATURES:

- **600 Vac**
- **96,000 Lumens & 160 lm/W**
- Cascading Surge Protection options available for 20kA at luminaire and 50kA at panel
- **6' Standard Pigtail**
- **IP66 & Universal Mounting Options** For Any Industrial Application Inside & Out At Your Facility



Scan QR Code Now For 2D/3D Drawings, IES Files, Spec Sheets & More



SPECIFICATIONS	
Luminous Efficacy	160 lm/W
CCT	5000K, Other Options Available
CRI	>Ra 70
Beam Angle	30°, 60°, 90°, 120° (Standard)
Input Voltage	600Vac
IP Rating	IP66
L70 Lifespan	>100,000 Hours @ 50°C
LED Driver	PowerLand
Chipset	Seoul
Operating Temp.	-40°C ~ +65°C / -40°F ~ +149°F
Warranty	5 Year Warranty
Certifications	DLC, ETL, UL, cUL

LUMENS	LED WATTAGE
96,000 lm	600W

MOUNTING OPTIONS

HIGH BAY	AREA/FLOOD LIGHT	MAST LIGHT
		
LOOP HANGING (STANDARD)	BRACKET 16	BRACKET 16 + BRACKET 07 (SLIP FITTER)
HOOK	90° ALU SHADE	VISOR
		
HK	90ALU	VISOR

FIXTURE ORDERING MATRIX

Product Name & Wattage	Lens Degree	Input Voltage	CCT	Options
BE-SL-600W Available in 450W (See Page 17) Available in 100W-300W (See Page 23)	D30 D60 D90 D120 (Standard) D120HT (High Temp ROBAX Glass)	SHV 600Vac	5000K Other Options Available	07 Slip Fitter 16 Adjustable Bracket HK Hook 90ALU 90° Aluminum Shade VISOR Visor SC (Included) Safety Cable SGS (Included) 20kA Surge Suppressor M50 50kA Panel Surge

Example: BE-SL-600W-D120-SHV-5000K-16-SC-SGS

HIGH TEMP INDUSTRIAL LED LIGHT

UP TO 80°C / 176°F

SUPERLUX - DRIVERLESS

The lightweight 20 lbs SuperLux Driverless has a high-temperature rating up to 80°C/176°F. Install it anywhere with our universal mounting options including overhead cranes, high bay, flood/area lighting, and outdoor pole/mast lighting.

Ideal for harsh environments with high temperatures found at heavy industrial plants in North America!

KEY FEATURES:

- **21,000 Lumens & 105 lm/W Luminous Efficacy**
- **Easy Installation:** Only 20 Pounds
- **Standard or Heavy Duty Custom Brackets**
- **Driverless High Temperature LED**
- **Directional Beam Spread Maximizes Foot Candles**



SPECIFICATIONS

Luminous Efficacy	105 lm/W
CCT	5000K, Other Options Available
CRI	>Ra 70
Beam Angle	30°, 60°, 90°, 120° (Standard)
Input Voltage	LV: 100-277Vac
IP Rating	IP66
Chipset	Seoul
Operating Temp.	-40°C ~ +80°C / -40°F ~ +176°F
Warranty	1 Year Warranty
Certifications	DLC, ETL, UL, cUL

LUMENS	LED WATTAGE
21,000 lm	200W

MOUNTING OPTIONS

<p>HIGH BAY</p>  <p>LOOP HANGING (STANDARD)</p>	<p>AREA/FLOOD LIGHT</p>  <p>BRACKET 16</p>	<p>MAST LIGHT</p>  <p>BRACKET 16 + BRACKET 07 (SLIP FITTER)</p>	<p>CRANE LIGHT</p>  <p>BRACKET 16</p>
<p>HOOK</p>  <p>HK</p>	<p>90° ALU SHADE</p>  <p>90ALU</p>		<p>VISOR</p>  <p>VISOR</p>

FIXTURE ORDERING MATRIX

Product Name	Wattage	Lens Degree	Input Voltage	CCT	Options
BE-SLD	200W	<p>D30</p> <p>D60</p> <p>D90</p> <p>D120 (Standard)</p> <p>D120HT (High Temp ROBAX Glass)</p>	<p>LV 100-277Vac</p>	<p>5000K</p> <p>Other Options Available</p>	<p>07 Slip Fitter</p> <p>16 Adjustable Bracket</p> <p>HK Hook</p> <p>90ALU 90° Aluminum Shade</p> <p>VISOR Visor</p> <p>SC Safety Cable</p> <p>SGS Surge Suppressor</p>

Example: BE-SLD-200W-D120-LV-5000K-16-SC-SGS

UNIVERSAL INDUSTRIAL LED LIGHT

72,000 LM

SUPERLUX 2 - BE-SL2

The most compact 1000 watt HID equivalent on the market! At only 28 lbs & up to 72,000lm, the SL2 can deliver ample lumens up to 80' mounting heights. Using only the best quality components proven to last in heavy industrial plants since 2008. Install it anywhere with our universal mounting options including overhead cranes, high bay, flood/area lighting, and outdoor pole/mast lighting.

Ideal for harsh environments found at heavy industrial plants in North America!

KEY FEATURES:

- **72,000 Lumens & 160 lm/W**
- Industry Leading 20kA Surge Protection (Comes Pre-Installed on 100V-480V models)
- **Easy Installation:** Only 28 pounds Including the 347V, 480V Model
- **Easy Access Driver Box with 6' External Pigtail**
- **IP66 & Universal Mounting Options** For Any Industrial Application Inside & Out At Your Facility



Scan QR Code Now For 2D/3D Drawings, IES Files, Spec Sheets & More



SPECIFICATIONS

Luminous Efficacy	160 lm/W
CCT	5000K, Other Options Available
CRI	>Ra 70
Beam Angle	30°, 60°, 90°, 120° (Standard)
Input Voltage	LV: 100-277Vac (250Vdc) HV: 277-480Vac SHV: 600Vac
IP Rating	IP66
L70 Lifespan	L90 >54,000 Hours @ 85°C
LED Driver	LV & HV: Inventronics SHV: PowerLand
Chipset	Seoul
Operating Temp.	-40°C ~ +65°C / -40°F ~ +149°F
Warranty	5 Year Warranty
Certifications	DLC, ETL, UL, cUL

LUMENS	LED WATTAGE
72,000 lm	450W

MOUNTING OPTIONS

HIGH BAY	AREA/FLOOD LIGHT	MAST LIGHT	CRANE LIGHT
			
LOOP HANGING (STANDARD)	BRACKET 24	BRACKET 24 + BRACKET 07 (SLIP FITTER)	BRACKET 24
FEMALE 3/4" NPT LID	HOOK	90° ALU SHADE	VISOR
			
NPT	HK	90ALU	VISOR

FIXTURE ORDERING MATRIX

Product Name	Wattage	Lens Degree	Input Voltage	CCT	Options
BE-SL2	450W	D30 D60 D90 D120 (Standard) D120HT (High Temp ROBAX Glass)	LV 100-277Vac HV 277-480Vac SHV 600Vac	5000K Other Options Available	07 Slip Fitter 24 Adjustable Bracket HK Hook 90ALU 90° Aluminum Shade VISOR Visor NPT Female 3/4" NPT Lid SC (Included) Safety Cable SGS (Included) 20kA Surge Suppressor RM Remote Mount Driver

Example: BE-SL2-450W-D120-LV-5000K-24-SC-SGS

UNIVERSAL INDUSTRIAL LED LIGHT

15,000 LM - 48,000 LM

SUPERLUX 3 - BE-SL3

The most compact 1000 watt HID equivalent on the market! At only 22 lbs & up to 48,000lm, the SL3 can deliver ample lumens up to 60' mounting heights. Using only the best quality components proven to last in heavy industrial plants since 2008. Install it anywhere with our universal mounting options including overhead cranes, high bay, flood/area lighting, and outdoor pole/mast lighting.

Ideal for harsh environments found at heavy industrial plants in North America!



KEY FEATURES:

- Up to 48,000 Lumens & 160 lm/W
- Industry Leading 20kA Surge Protection (Pre-Installed!)
- Easy Installation: Only 22 lbs Including The 347v, 480v Model
- Simple Maintenance Driver Box With Easy Access Terminal Block & 6' Standard Pigtail
- IP66 & Universal Mounting Options For Any Industrial Application Inside & Out At Your Facility



Scan QR Code Now For 2D/3D Drawings, IES Files, Spec Sheets & More



INVENTRONICS
DRIVING THE LIGHTING REVOLUTION



SPECIFICATIONS

Luminous Efficacy	160 lm/W (240W & 300W) 150 lm/W (100W-200W)
CCT	5000K, Other Options Available
CRI	>Ra 70
Beam Angle	30°, 60°, 90°, 120° (Standard)
Input Voltage	LV: 100-277Vac (250Vdc) HV: 277-480Vac SHV: 600Vac (150W-300W)
IP Rating	IP66
L70 Lifespan	>100,000 Hours @ 50°C
LED Driver	Sosen (LV), Inventronics (HV), Powerland (SHV)
Chipset	Seoul
Operating Temp.	-40°C ~ +65°C / -40°F ~ +149°F
Warranty	5 Year Warranty
Certifications	DLC, ETL, UL, cUL

LUMENS	LED WATTAGE
48,000 lm	300W
38,400 lm	240W
30,000 lm	200W
22,500 lm	150W
18,000 lm	120W
15,000 lm	100W

MOUNTING OPTIONS

HIGH BAY	AREA/FLOOD LIGHT	MAST LIGHT	CRANE LIGHT
			
LOOP HANGING (STANDARD)	BRACKET 30	BRACKET 30 + BRACKET 07 (SLIP FITTER)	BRACKET 30
FEMALE 3/4" NPT LID	HOOK	90° ALU SHADE	POLYCARBONATE REFLECTOR
			
NPT	HK	90ALU	PC

FIXTURE ORDERING MATRIX

Product Name	Wattage	Lens Degree	Input Voltage	CCT	Options
BE-SL3 Available in HAZLOC See Page 35	100W	D30	LV 100-277Vac (250Vdc)	5000K Other Options Available	07 Slip Fitter
	120W	D60			30 Adjustable Bracket
	150W	D90	HV 277-480Vac		HK Hook
	200W	D120 (Standard)			90ALU 90° Aluminum Shade
	240W	D120HT (High Temp ROBAX Glass)			PC Polycarbonate Reflector
	300W				NPT Female 3/4" NPT Lid
					RM Remote Mount Driver
					SC (Included) Safety Cable
					SGS (Included) 20kA Surge Suppressor

Example: BE-SL3-300W-D120-LV-5000K-30-SC-SGS

UNIVERSAL INDUSTRIAL LED LIGHT

7,000 LM - 12,600 LM

BE-CHB

The CHB is a low-profile, durable fixture designed to quickly and easily upgrade existing HID and fluorescent fixtures. With a superior chipset, driver and high lumen output of 140lm/W, the CHB is built to reduce lighting maintenance and downtime by replacing up to 250W metal halide fixtures.

Adjustable and non-adjustable bracket options are available for mounting. Temp rating up to +65°C (+149°F).

KEY FEATURES:

- **MeanWell** Driver - 100/277 Vac (127-431Vdc)
- **Nichia** Chip Set - L70 Lifespan of >100,000 Hours
- **Low Profile** Durable High Bay
- **140 lm/W** High Lumen Output
- **IP65** Water Spray Test Approved
- **+65°C (+149°F)** Temperature Rating
- **6' Pigtail Standard**
- Multiple **Mounting Options** Available for Various Applications



Scan QR Code Now For 2D/3D Drawings, IES Files, Spec Sheets & More



SPECIFICATIONS

Luminous Efficacy	140 lm/W
CCT	3000K, 4000K, 5000K (Standard)
CRI	>Ra 70
Beam Angle	90°, 120°
Input Voltage	LV: 100-277Vac (250 Vdc)
IP Rating	IP65
L70 Lifespan	>100,000 Hours
LED Driver	MeanWell
Chipset	Nichia
Operating Temp.	-30°C ~ +65°C / -22°F ~ +149°F
Warranty	5 Year Warranty
Certifications	cUL, CE, DLC, UL, RoHS

LUMENS	LED WATTAGE
12,600 lm	90W
9,800 lm	70W
7,000 lm	50W

MOUNTING OPTIONS

HIGH BAY	AREA/FLOOD LIGHT	MAST LIGHT	CRANE LIGHT
			
LOOP HANGING (STANDARD)	BRACKET 22	BRACKET 22 + BRACKET 07 (SLIP FITTER)	BRACKET 27
HOOK	90° ALU SHADE	PC REFLECTOR	
			
HK	90ALU	PC	

FIXTURE ORDERING MATRIX

Product Name	Wattage	Lens Degree	Input Voltage	CCT	Options
BE-CHB	50W	D90 D120	LV 100-277Vac	3000K	22 Adjustable Bracket 07 Slip Fitter 27 Non-Adjustable Bracket SC Safety Cable SGS Surge Suppressor HK Hook 90ALU 90° ALU Shade PC PC Reflector
	70W			4000K	
	90W			5000K (Standard)	

Example: BE-CHB-50W-D120-LV-5000K-22-07-SC-SGS

FOOD PROCESSING LIGHT

BE-HCP06

The Food Processing Light is designed specifically for food processing applications. This fixture meets or exceeds all NSF inspection zone requirements. The streamlined design allows easy cleaning and prevents the build-up of any liquid or particles.

Ideal for high bay lighting anywhere the NSF standards are required including inspection areas, wash-down zones, freezers and more.

KEY FEATURES:

- **IP69K** Highest Level of Protection Against Water and High-Pressure Washdown
- **CRI 93** High Colour Rendering for Inspection Zones
- **Shatterproof** Polycarbonate Lens
- **Powder Coating + E-Coating** Ensures Durability and Performance, Designed to **Resist Flaking & Corrosion**
- **No Exposed Fasteners**
- L70 Lifespan of **>100,000 Hours**
- **New Compact HCP06 Mini for 70W to 150W**



SPECIFICATIONS

Luminous Efficacy	140 lm/W (70W-150W) 125 lm/W (200W-240W)
CCT	4000K, 5000K (Standard)
CRI	>Ra 90
Beam Angle	120°
Input Voltage	LV: 100-277Vac (Standard) HV: 277-480Vac, 50/60 Hz
IP Rating	IP69K
L70 Lifespan	>100,000 Hours
LED Driver	SOSEN
Dimming	Dimmable
Chipset	Nichia
Operating Temp.	-30°C ~ +50°C / -22°F ~ +122°F
Warranty	5 Year Warranty
Certifications	NSF, cUL, UL, CE, RoHS, DLC

HCP06 Mini



70W - 150W

HCP06



200W - 240W



Scan QR Code Now For 2D/3D Drawings, IES Files, Spec Sheets & More

LUMENS	LED WATTAGE
30,000 lm	240W
25,000 lm	200W
21,000 lm	150W
16,800 lm	120W
14,000 lm	100W
9,800 lm	70W

MOUNTING OPTIONS

LOOP HANGING



STANDARD

FEMALE 3/4" NPT LID



NPT

SURFACE MOUNT



BRACKET 21

**STEM MOUNT (MALE 3/4" NPT)
(SEPERATE CORD ENTRY NOT THROUGH MIDDLE)**



STM

FIXTURE ORDERING MATRIX

Product Name	Wattage	Lens Degree	Input Voltage	CCT	Options
BE-HCP06	70W	D120	LV 100-277Vac (Standard)	4000K (Special Order)	NPT Female 3/4" NPT Lid
	100W				21 Surface Mount Bracket 21
	120W				STM Male 3/4" NPT Stem
	150W				MS Built-In Motion Sensor (Special Order)
	200W				SC Safety Cable
	240W				SGS Surge Suppressor
				5000K (Standard)	3PLUG 3 Prong Cable Connect

Example: BE-HCP06-100W-D120-LV-5000K-NPT-SC-SGS

LINEAR FOOD PROCESSING LIGHT

BE-LHB19

The Linear Food Processing Light is designed specifically for food processing applications. This fixture meets or exceeds all NSF inspection zone requirements. The small, slender LED has an IP69K rating for heavy washdown applications or daily sanitation.

Ideal for high bay lighting anywhere the NSF standards are required including inspection areas, wash-down zones, freezers and more.




KEY FEATURES:

- **IP69K** Highest Level of Protection Against Water & High-Pressure Washdown
- **CRI 90** High Colour Rendering for Inspection Zones
- **Sandblasting Oxidation**
- **Shatterproof** Polycarbonate Lens
- **Built-In 4kV Surge Protection**
- **Corrosion Resistant and Streamlined** Body Design
- L70 Lifespan of **>100,000 Hours**
- **Battery Backup** (120W Only)
- **70W-2FT / 120W-4FT / 100W-6FT**



SPECIFICATIONS

Luminous Efficacy	120 lm/W
CCT	4000K, 5000K Other Options Available
CRI	>Ra 90
Beam Angle	60x90°, 90x100° (Standard)
Input Voltage	100-347Vac
IP Rating	IP69K
L70 Lifespan	>100,000 Hours
LED Driver	WP, Battery Backup (120W Only)
Dimming	Dimmable
Chipset	Nichia
Operating Temp.	-30°C ~ +50°C / -22°F ~ +122°F
Warranty	5 Year Warranty
Certifications	NSF, RoHS, DLC, CE, UL, cUL

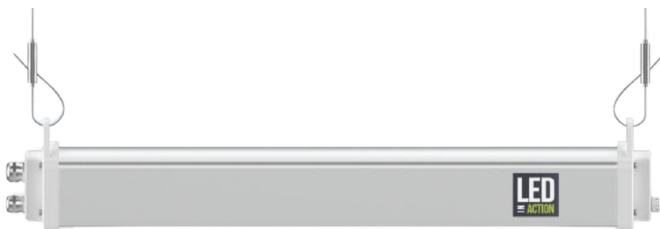

Two Lights Shipped Per Box



Scan QR Code Now For 2D/3D Drawings, IES Files, Spec Sheets & More

SIZE	LUMENS	LED WATTAGE
6 FT	12,000 lm	100W
4 FT	14,400 lm	120W
2 FT	8,400 lm	70W

SIZES



6 FT - 100W

4 FT - 120W

2 FT - 70W

MOUNTING OPTIONS

SUSPENSION MOUNT (STANDARD)



CEILING MOUNT



CM

FIXTURE ORDERING MATRIX

Product Name	Wattage	Lens Degree	CCT	Options
BE-LHB19	70W (2FT)	D60*90 (Special Order) D90*100 (Standard)	4000K (Special Order)	CM Ceiling Mount BATT Battery Backup (120W Only) SGS Surge Suppressor QC 3 Prong Cable Quick Connect
	120W (4FT)		5000K (Standard)	
	100W (6FT)		Other Options Available	

Example: BE-LHB19-120W-D90*100-5000K-CM-SGS

HIGH TEMP LINEAR HAZLOC

BE-EXP-1319C


The 1319C fixture withstands extreme temperatures, explosion and fire hazards, as well as flammable gases and vapours. This linear driverless LED fixture can withstand temperatures up to 100°C with CID2 and CIID2 classification ratings.

Ideal for high heat environments, petrochemical complexes, painting facilities, offshore platforms, oil and gas complexes, and more.



KEY FEATURES:

- CID2 Group A, B, C, D
- CIID2 Group F, G
- CID1 Option Available (40W Only)
- Temp Rating up to -40°C ~ +100°C (-40°F ~ +212°F)
- Built-In 6kV Surge Protection
- Mounting Options
- Driverless Hazardous LED
- 6' Length UL SOOW 105°C 18AWG Cable
- L70 Lifespan of >60,000 Hours

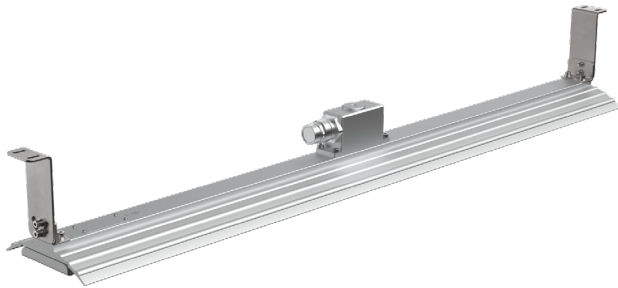

Scan QR Code Now For 2D/3D Drawings, IES Files, Spec Sheets & More

SPECIFICATIONS

Luminous Efficacy	120 lm/W
CCT	3000K, 5000K (Standard)
CRI	>Ra 70 (5000K), >Ra 80 (3000K)
Beam Angle	>110°
Input Voltage	120V / 277V Other Voltages Available
IP Rating	IP67
L70 Lifespan	>60,000 Hours

40W:

-40°C to +100°C / -40°F to 212°F

Operating Temp.

60W & 80W-LV:

-40°C to 85°C / -40°F to 185°F

120W:

-40°C to 65°C / -40°F to 149°F

Dimensions	2FT & 4FT
Warranty	65°C and Below - 5 Year Warranty 66°C-85°C - 2 year Warranty 86°C - 100°C - 1 Year Warranty

Certifications	UL, cUL
----------------	---------

Classifications	CID2 Group A, B, C, D CIID2 Group F, G CID1 Available - 40W Only
-----------------	--

LUMENS	LED WATTAGE
14,400 lm	120W
9,600 lm	80W
7,200 lm	60W
4,800 lm	40W


MOUNTING OPTIONS

ADJUSTABLE WALL/HANGING MOUNT (2FT)



WHT

ADJUSTABLE WALL/HANGING MOUNT (4FT)

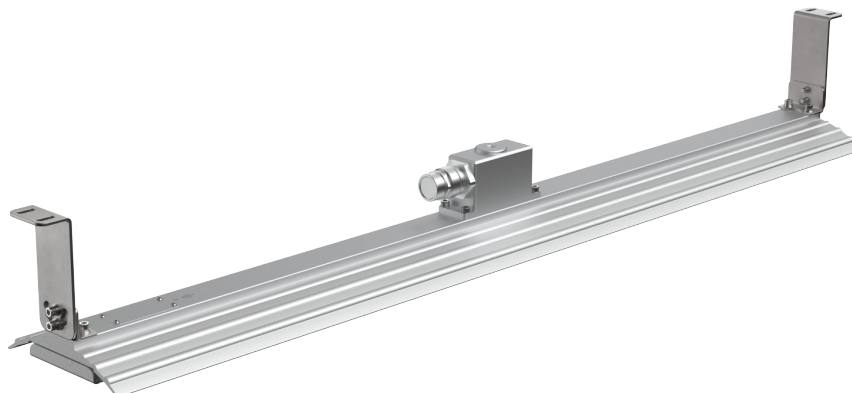

WHT

FIXTURE ORDERING MATRIX

Product Name	Size	Wattage	Input Voltage	CCT	Classification	Options
BE-EXP-1319C	2FT	40W 60W	120V 277V	5000K Other Options Available	CID2 / CIID2 CID1 (40W Only) Available Upon Request	WHT Adjustable Wall/Hanging Mount (Standard) SC Safety Cable SGS Surge Suppressor
	4FT	40W 80W 120W	120V 277V Other Voltages Available			

Example: BE-EXP-1319C-2FT-40W-120V-5000K-CID2-WHT-SC-SGS

LINEAR HAZLOC LED


BE-EXP-LN06

The EXP-LN06 linear fixture is hazardous rated with NEMA 4X and marine grade ratings suitable for indoor or outdoor harsh environments. This LED flood light fixture has classification ratings of CID2, CIID2, and CIII.


Ideal for petrochemical complexes, offshore platforms, oil and gas refineries, and more.

KEY FEATURES:

- **Fiberglass Reinforced Polycarbonate**
- **2' Weight: 7 Pounds / 4' Weight: 11 Pounds**
- **CID2, CIID2, CIII (Inquire for CID1 Options)**
- **IP66 / NEMA 4X / UL1598A Marine Grade**
- **HV up to 480 Vac / Built-In 10kA Surge Protection**
- **Emergency Battery Backup 9W at 1.5 Hours**
- **Waterproof, Dust-Proof, Anti-Corrosion & Shock Resistance**
- **Clear Polycarbonate Lens**

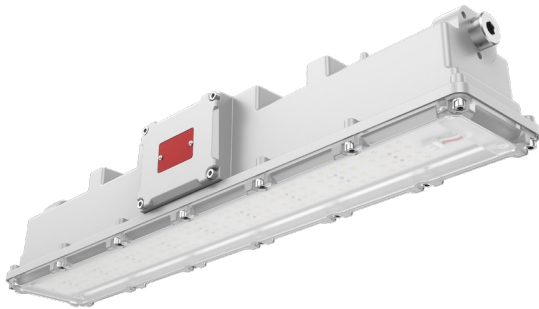

Scan QR Code Now For 2D/3D Drawings, IES Files, Spec Sheets & More

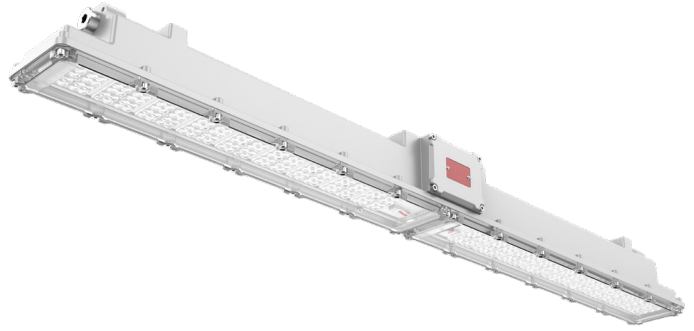

INVENTRONICS
DRIVING THE LIGHTING REVOLUTION

LUMILEDS









SPECIFICATIONS

Luminous Efficacy	150 lm/W
CCT	5000K, Other Options Available
CRI	Ra 70
Input Voltage	LV: 120-277Vac HV: 277-480Vac
IP Rating	IP66 / NEMA 4X / IK08
Lens Degree	D146 Other Options Available
Operating Temp.	-40°C ~ +65°C / -40°F ~ +149°F
Mounting Options	Ceiling, Adjustable Bracket, Conduit, Loop, 3/4" Stem Mount
Driver	Inventronics
Chipset	Lumileds
Warranty	5 Year Warranty
Certifications	UL, cUL
Classifications	CID2 Group A, B, C, D CIID2 Group F, G CIII

LUMENS	WATTAGE	SIZE
14,000 lm	100W	4 FT
11,200 lm	80W	4 FT
8,400 lm	60W	4 FT
5,600 lm	40W (LV Only)	2 FT
4,500 lm	30W (LV Only)	2 FT

MOUNTING OPTIONS
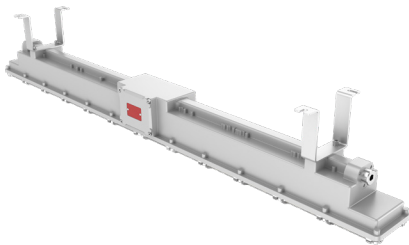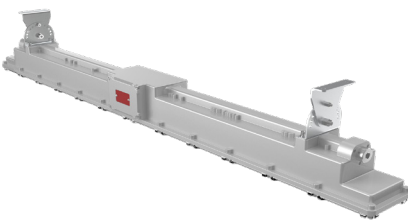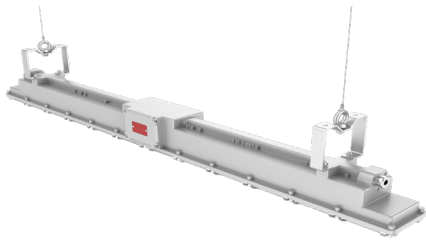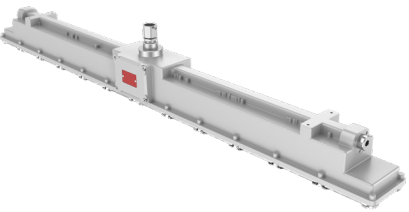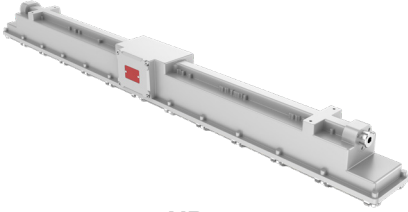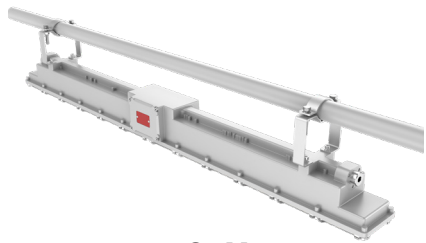
<p>ADJUSTABLE BRACKET (STANDARD)</p>  <p>AB</p>	<p>CEILING MOUNT</p>  <p>CM</p>	<p>LOOP MOUNT</p>  <p>LM</p>
<p>PENDANT MOUNT (3/4" NPT) (SPECIAL ORDER)</p>  <p>PM</p>	<p>NPT SIDE ENTRY (3/4" NPT)</p>  <p>NPT</p>	<p>CONDUIT MOUNT</p>  <p>CDM</p>

FIXTURE ORDERING MATRIX

Product Name	Wattage	Size	Input Voltage	Lens Degree	CCT	Classification	Options
BE-EXP-LN06	30W 40W	2FT	LV 120-277Vac	D146 Other Options Available	5000K	CID2 / CIID2 / CIII	<p>AB (Standard) Adjustable Bracket</p> <p>NPT Female 3/4" Side Entry NPT Mount</p> <p>PM Pendant Mount (Special Order)</p> <p>CM Ceiling Mount</p> <p>LM Loop Mount</p> <p>CDM Conduit Mount</p> <p>PT No Pigtail (Standard)</p> <p>6' or 10' Pigtail (Optional)</p>
	60W 80W 100W	4FT	LV 120-277Vac HV 277-480Vac				

Example: BE-EXP-LN06-40W-2FT-LV-D146-5000K-CID2-AB

HIGH TEMP HAZLOC

BE-HH03

The HH03 fixture withstands extreme temperatures, explosion and fire hazards, as well as flammable gases and vapours. This driverless LED fixture can withstand temperatures up to 100°C with a CID2 classification rating.

Ideal for high heat environments, petrochemical complexes, painting facilities, offshore platforms, oil and gas complexes, and more.

KEY FEATURES:

- CID2 Group A, B, C, D / CID1 Options Available
- Temp Rating of -40°C to +100°C / -40°F to +212°F
- Built-In 6kV Surge Protection
- Mounting Options
- Driverless Hazardous LED
- 6' Length UL SOOW 105°C 18AWG Cable
- L70 Lifespan of >60,000 Hours



SPECIFICATIONS

Luminous Efficacy	100 lm/W - COB Chip
CCT	3000K, 5000K (Standard)
CRI	>Ra 70 (5000K), >Ra 80 (3000K)
Beam Angle	>110°
Input Voltage	120V / 230V / 277V
IP Rating	IP67
L70 Lifespan	>60,000 Hours
Operating Temp.	30W-60W: -40°C to +100°C / -40°F to +212°F 80W: -40°C to +85°C / -40°F to +185°F
Warranty	66°C-85°C - 2 year Warranty 86°C-100°C - 1 Year Warranty
Certifications	UL, cUL
Classifications	CID2 Group A, B, C, D Ask About Our CID1 Options



Scan QR Code Now For 2D/3D Drawings, IES Files, Spec Sheets & More

LUMENS	LED WATTAGE
10,000 lm	100W
8,000 lm	80W
6,000 lm	60W
3,000 lm	30W

MOUNTING OPTIONS

FEMALE 3/4" NPT



(STANDARD)

ADJUSTABLE WALL/HANGING MOUNT



WHT

STANCHION MOUNT



SM25



SM90

APPLETON MERCMASTER III™ ADAPTER



ATOP

CROUSE-HINDS™ CHAMP ADAPTER



CTOP

GE H2 FILTR-GARD® ADAPTER



GTOP

FIXTURE ORDERING MATRIX

Product Name	Wattage	Input Voltage	CCT	Classification	Options
BE-HH03	30W	120V 230V 277V	5000K Other Options Available	CID2 Ask About Our CID1 Options	NPT Female 3/4" NPT Mount (Standard) WHT Adjustable Wall / Hanging Mount SM25/SM90 (Special Order) Stanchion Mount 25°/90° ATOP Appleton Mercmaster III™ Adapter CTOP Crouse-Hinds™ Champ Adapter GTOP GE H2 FILTR-GARD® Adapter SGS Surge Suppressor
	60W				
	80W				
	100W				

Example: BE-HH03-30W-120V-5000K-CID2-WHT

HAZLOC AREA LIGHT

EXP-HH33 / EXP-A / EXP-D

Our hazardous area lights are built for environments where flammable gases and vapours are present. Three options available to suit your location best; high temperature ratings up to +100°C/212°F, and classification ratings for CID1 or CID2 environments.

Ideal for hazardous environments, petrochemical complexes, painting facilities, offshore platforms, oil and gas complexes, and more.

KEY FEATURES:

- CID1, CID2, CIID1, CIID2, CIII
- High Temp Rating up to +100°C / +212°F
- Various Mounting Options



EXP-HH33



EXP-A



EXP-D

SPECIFICATIONS

Part Number	HH33	EXP-A	EXP-D
Luminous Efficacy	120 lm/W	140 lm/W	
CCT	5000K, Other Options Available		
CRI	>70		
Input Voltage	120V / 277V	LV: 100-277Vac HV: 200-480Vac	
IP Rating	IP67	IP66	
Temp. Rating	+100°C/212°	+55°C/131°F	
L70 Lifespan	60,00 Hours	50,000 Hours	
Warranty	5 Years		
Classifications	CID2 CIID2 CIII	CID2 CIID1 CIID2 CIII	CID1 CID2 CIID1 CIID2

PART #	FEATURE	LUMENS	WATTAGE
BE-EXP-HH33	High Temp Up to +100°C/212°F	14,416 lm	120W
BE-EXP-A	CID2	8,400 lm - 56,000 lm	60W - 400W
BE-EXP-D	CID1	8,400 lm - 21,000 lm	60W - 150W


MOUNTING OPTIONS

EXP-HH33




ADJUSTABLE WALL/HANGING MOUNT (WHT)

EXP-A



CEILING MOUNT (CM) / WALL MOUNT (WM)

EXP-D



CEILING MOUNT (CM) / WALL MOUNT (WM)

FIXTURE ORDERING MATRIX

Product Name	Wattage	Input Voltage	CCT	Classification	Options
BE-EXP-HH33 (100°C HIGH TEMP)	120W Lower Wattage Available Up to +80°C/176°F	120V 277V	5000K Other Options Available	CID2/CIID2/CIII	WHT Adjustable Wall / Hanging Mount
BE-EXP-A (CID2)	60W 80W 100W 150W 200W 300W 400W	LV 100-277V HV 200-480V		CID2/CIID1/CIID2/CIII	CM Ceiling Mount WM Wall Mount
BE-EXP-D (CID1)	60W 80W 100W 150W	LV 100-277V HV 200-480V		CID1/CID2/CIID1/CIID2/CIII	CM Ceiling Mount WM Wall Mount

Example: BE-HH33-120W-120V-5000K-CID2-WHT

UNIVERSAL HAZLOC LED

15,000 LM - 48,000 LM

SUPERLUX 3 - BE-EXP-SL3

The most compact 1000 watt HID equivalent on the market! At only 22 lbs & up to 48,000lm, the SL3 can deliver ample lumens up to 60' mounting heights. Using only the best quality components proven to last in heavy industrial plants since 2008. Install it anywhere with our universal mounting options including overhead cranes, high bay, flood/area lighting, and outdoor pole/mast lighting.

Ideal for harsh environments found at heavy industrial plants in North America!

KEY FEATURES:

- Up to 48,000 Lumens & 160 lm/W
- Industry Leading 20kA Surge Protection (Pre-Installed!)
- Easy Installation: Only 22 lbs Including The 347V, 480V & 600V Models
- Simple Maintenance Driver Box With Easy Access Terminal Block
- Dual Cable Entry Option
- IP66 & Universal Mounting Options For Any Hazloc Industrial Application Inside & Out At Your Facility



SPECIFICATIONS

Luminous Efficacy	160 lm/W (240W & 300W) 150 lm/W (100W-200W)
CCT	5000K, Other Options Available
CRI	>Ra 70
Beam Angle	120° (Standard) Other Options Available
Input Voltage	LV: 100-277Vac (250Vdc) HV: 277-480Vac SHV: 600Vac (150W-300W)
IP Rating	IP66
L70 Lifespan	>100,000 Hours @ 50°C
Chipset	Seoul
Operating Temp.	-40°C ~ +65°C / -40°F ~ +149°F
Warranty	5 Year Warranty
Classifications	CID2
Certifications	cUL, UL 844

LUMENS	LED WATTAGE
48,000 lm	300W
38,400 lm	240W
30,000 lm	200W
22,500 lm	150W
18,000 lm	120W
15,000 lm	100W

MOUNTING OPTIONS

FEMALE 3/4" NPT LID



(STANDARD)

AREA/FLOOD LIGHT



BRACKET 30

MAST LIGHT



BRACKET 30 + BRACKET 07 (SLIP FITTER)

**HEAVY DUTY BRACKET
CRANE**



BRACKET 30

**LIGHT DUTY BRACKET
ADJUSTABLE**



BRACKET 31

90° ALU SHADE



90ALU

**POLYCARBONATE
REFLECTOR**



PC

FIXTURE ORDERING MATRIX

Product Name	Wattage	Lens Degree	Input Voltage	CCT	Classification	Options
BE-EXP-SL3 Available in Non-Hazardous See Page 19	100W	D120 Other Options Available	LV 100-277Vac (250Vdc) HV 277-480Vac SHV 600Vac (150W, 200W, 240W, 300W)	5000K Other Options Available	CID2	07 Slip Fitter
	120W					30 Heavy Duty Adjustable Bracket
	150W					31 Light Duty Adjustable Bracket
	200W					90ALU 90° Aluminum Shade
	240W					PC Polycarbonate Reflector
	300W					SC (Included) Safety Cable SGS (Included) 20kA Surge Suppressor PT No Pigtail (Standard) 6' Pigtail (Optional) 10' Pigtail (Optional)

Example: BE-EXP-SL3-300W-D120-LV-5000K-CID2-30-SC-SGS

UNIVERSAL HAZLOC LED

BE-EXP-RD05


The EXP-RD05 fixture is hazardous rated with NEMA 4X and marine grade ratings suitable for indoor or outdoor harsh environments. This LED fixture has classification ratings of CID2, CIID1, CIID2, and CIII.

Ideal for petrochemical complexes, painting facilities, offshore platforms, oil and gas refineries, and more.

KEY FEATURES:

- CID2, CIID1, CIID2, CIII / Inquire for CID1 Options
- IP66 / NEMA 4X
- UL1589A Marine Grade
- HV up to 480 Vac
- Temp Rating of -40°C up to +65°C / -40°F ~ +149°F
- Dual Cable Entry Option for Daisy Chain Connect
- Battery Backup 9W for 1.5 Hours (50W Only)
- 6 Easily Interchangeable Mounting Options
- Built in 10kA Surge Protection

Ask About Our Battery Backup Options

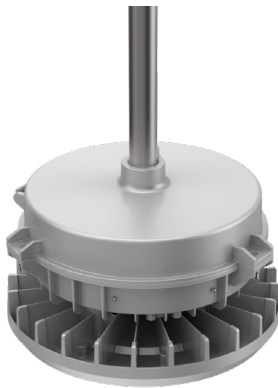

Scan QR Code Now For 2D/3D Drawings, IES Files, Spec Sheets & More



INVENTRONICS
DRIVING THE LIGHTING REVOLUTION

LUMILEDS



SPECIFICATIONS

Luminous Efficacy	140 lm/W
CCT	5000K, Other Options Available
CRI	Ra 70
Beam Angle	30W/50W/75W/100W: D140 150W-240W: D135 Other Options Available
Input Voltage	LV: 120-277Vac HV: 277-480Vac
IP Rating	IP66 / NEMA 4X / IK08
Operating Temp.	-40°C ~ +65°C / -40°F ~ +149°F
Driver	Inventronics
Chipset	Lumileds
Warranty	5 Year Warranty
Certifications	UL, cUL, CSA
Classifications	CID2 Group A, B, C, D CIID1 Group E, F, G CIID2 Group F, G CIII

LUMENS	WATTAGE
33,600 lm	240W
28,000 lm	200W
21,000 lm	150W
14,000 lm	100W
10,500 lm	75W
7,000 lm	50W
4,000 lm	30W

MOUNTING OPTIONS

<p>FEMALE 3/4" NPT</p>  <p>(STANDARD)</p>	<p>CEILING MOUNT (DUAL CABLE DAISY CHAIN)</p>  <p>CM</p>	<p>WALL MOUNT</p>  <p>WM</p>
<p>25° STANCHION MOUNT</p>  <p>SM25</p>	<p>90° STANCHION MOUNT</p>  <p>SM90</p>	<p>ADJUSTABLE BRACKET</p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;">  <p>AB</p> </div> <div style="text-align: center;">  <p>CM-AB</p> </div> </div>

FIXTURE ORDERING MATRIX

Product Name	Wattage	Input Voltage	Lens	CCT	Classification	Options
BE-EXP-RD05	30W	LV 120-277Vac (Standard) HV 277-480Vac (Special Order)	D140	5000K Other Options Available	CID2 / CIID1 / CIID2 / CIII	NPT Female 3/4" NPT Mount (Standard)
	50W		Other Options Available			CM Ceiling Mount
	75W		WM Wall Mount			
	100W		SM25 25° Stanchion Mount			
	150W		SM90 90° Stanchion Mount			
	200W		AB NPT Lid with Adjustable Bracket			
	240W		CM-AB Ceiling Mount Lid with Adjustable Bracket			
						PT No Pigtail (Standard) 6' Pigtail (Optional) 10' Pigtail (Optional)

Example: BE-EXP-RD05-150W-LV-D135-5000K-CID2-NPT

TELESCOPIC POLE MOUNT

COMPATIBLE WITH RD05 & MN03 FIXTURES

BE-TPM

The telescoping pole mount is designed for hard to reach or dangerous areas where safety is a concern when installing new fixtures or performing maintenance tasks. This compression spring pole mount eliminates the need for portable ladders and any fall protection equipment.

KEY FEATURES:

- Fixtures can be Rotated 360° During Installation
- Stainless Steel Compression Spring
- Hot Dip Galvanized Finish
- Multiple Mounting Options: Tubular Rail, Angular Rail, Inclined Rail & Wall Mount




SPECIFICATIONS

Raised Height	107.87"
Compressed Height	65.74"
Exposed Wires at Top	11.81"
Exposed Wires at Bottom	43.30"
Cable Voltage	300V
Cable Dimensions	3*13AWG/5*16AWG
Dimensions	Φ3.93"x107.87"
Net Weight	30.86 lbs
IK Rating	IK10
Material	Spring: Stainless Steel Light Pole: Structural Steel Locking Collar: Aluminum Base: Aluminum
Warranty	5 Years

MOUNTING OPTIONS

ANGULAR RAIL MOUNT	TUBULAR RAIL MOUNT	INCLINED RAIL MOUNT	WALL MOUNT	DUAL ENTRY CONNECTOR	TRIPLE ENTRY CONNECTOR
				EXTB2	EXTB3

HAZLOC LIGHTING CID1 RATINGS



Inquire for More Information

HAZLOC B-TOP


BE-EXP-BTOP

Compatible with Crouse-Hinds™ Champ and Appleton Mercmaster III™. The B-TOP fixture withstands explosion and fire hazards, as well as flammable gases and vapours. This hazardous location LED light has CID2, CIID1, CIID2, and CIII classification ratings.

Ideal for hazardous environments, petrochemical complexes, painting facilities, offshore platforms, oil and gas complexes, and more.

KEY FEATURES:

- **Compatible with Crouse-Hinds™ Champ & Appleton Mercmaster III™**
- **10Kv SPD Installed**
- **Simple Terminal Block Electrical Connection**
- **CID2, CIID1, CIID2, CIII**
- **IP66 / NEMA 4X**
- **MeanWell Driver**

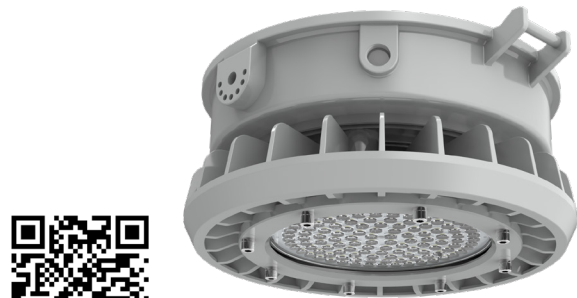

Scan QR Code Now For 2D/3D Drawings, IES Files, Spec Sheets & More

SPECIFICATIONS

Luminous Efficacy	140 lm/W
CCT	5000K, Other Options Available
CRI	> 70
Input Voltage	LV: 120-277Vac HV: 200-480Vac
IP Rating	IP66
Operating Temp.	-40°C ~ +55°C / -40°F ~ +131°F
L70 Lifespan	>50,000 Hours
Adapter	Crouse-Hinds, Appleton
Warranty	5 Year Warranty
Certifications	UL 1598A, cUL, DLC 5.1 Standard
Classifications	CIID2 Group A, B, C, D CIID1 Group E, F, G CIID2 Group F, G CIII

LUMENS	WATTAGE
28,000 lm	200W
21,000 lm	150W
16,800 lm	120W
14,000 lm	100W
11,200 lm	80W
8,400 lm	60W
7,000 lm	50W
5,600 lm	40W
2,800 lm	20W

MOUNTING OPTIONS

**FROSTED GLASS DOME & WIRE GUARD
(STANDARD)
(CROUSE-HINDS™ CHAMP COMPATIBLE)**



C

FLAT GLASS



D120

APPLETON MERCMASTER III™ ADAPTER



APP

GE H2 FILTR-GARD® ADAPTER



GEA

FIXTURE ORDERING MATRIX

Product Name	Wattage	Input Voltage	CCT	Classification	Options
BE-EXP-BTOP	40W	LV 120-277Vac (Standard)	5000K Other Options Available	CID2 / CIID1 / CIID2 / CIII	Standard is Crouse-Hinds Compatible C Frosted Glass Dome with Wire Guard (Standard) D120 Flat Glass APP Appleton Adapter GEA GE Adapter
	50W				
	60W				
	80W				
	100W	HV 200-480Vac			
	120W				
	150W				
	200W				

Example: BE-EXP-BTOP-60W-LV-5000K-CID2-C

HAZLOC FLOOD LED


BE-EXP-FL23

The EXP-FL23 fixture is hazardous rated with NEMA 4X and marine grade ratings suitable for indoor or outdoor harsh environments. This LED flood light fixture has classification ratings of CID2, CIID1, CIID2, and CIII.

Ideal for petrochemical complexes, offshore platforms, oil and gas refineries, and more.

KEY FEATURES:

- CID2, CIID1, CIID2, CIII
- IP66 / NEMA 4X
- UL1598A Marine Grade
- HV up to 480 Vac
- Temp Rating of -40°C up to +65°C / -40°F ~ +149°F
- Built-In 10kA Surge Protection
- Dual Cable Entry Option for Daisy Chain Connect
- Stainless Steel Bracket Included & Installed
- Copper Aluminum Body for Corrosion Resistance
- PC Lens + Tempered Glass
- Visor & Wire Guard Available

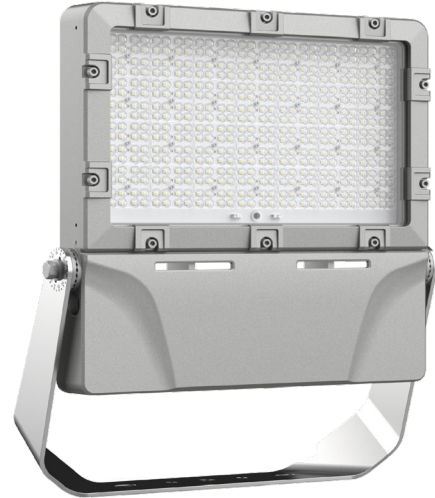

INVENTRONICS
DRIVING THE LIGHTING REVOLUTION

NICHIA




SPECIFICATIONS

Luminous Efficacy	150 lm/W
CCT	5000K, Other Options Available
CRI	Ra 70
Input Voltage	LV: 120-277Vac HV: 277-480Vac
IP Rating	IP66 / NEMA 4X / IK08
Operating Temp.	-40°C ~ +65°C / -40°F ~ +149°F
Lens Degree	D90 Other Options Available
Accessories	Visor, Wire Guard
Driver	Inventronics / 10kA SPD
Chipset	Nichia
Warranty	5 Year Warranty
Certifications	UL, cUL
Classifications	CID2 Groups A, B, C, D CIID1 Groups E, F, G CIID2 Groups F, G CIII

Visor



Wire Guard



Scan QR Code Now For 2D/3D Drawings, IES Files, Spec Sheets & More


LUMENS	WATTAGE
36,000 lm	240W
30,000 lm	200W
22,500 lm	150W

MOUNTING OPTIONS


STAINLESS STEEL BRACKET (INCLUDED)



VISOR

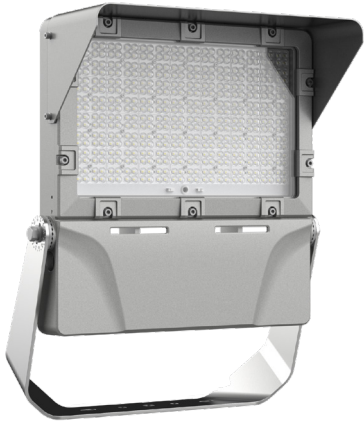

WIRE GUARD

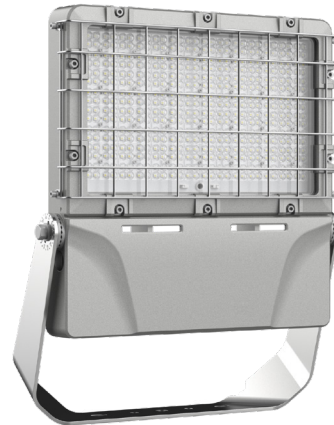

FIXTURE ORDERING MATRIX

Product Name	Wattage	Input Voltage	Degree Lens	CCT	Classification	Options
BE-EXP-FL23	150W	LV 120-277 Vac	D90	5000K	CID2 / CIID1 / CIID2 / CIII	VISOR
	200W		Other Options Available	Other Options Available		WIRE GUARD
	240W	HV 277-480 Vac				07 Slip Fitter
						PT No Pigtail (Standard)
						6' Pigtail (Optional)
						10' Pigtail (Optional)

Example: BE-EXP-FL23-150W-LV-D90-5000K-CID2-VISOR-6PT

INDUSTRIAL LED FLOOD LIGHT


BE-FL27

The FL27 LED flood is built for harsh environments. It's made with anti-corrosion low copper housing and a galvanized bracket. Available with loop-in and loop-out cable entry to minimize wiring.

Ideal for heavy industrial sites and indoor and outdoor applications.

KEY FEATURES:

- Temp Rating of -30°C to +50°C / -22°F to +122°F
- Built-in 10kA Surge Protection
- Anti-Glare Control
- Pole Mounting Bracket Available
- Copper Housing for Corrosion Resistance
- Polycarbonate Lens
- Standard 5' Pigtail

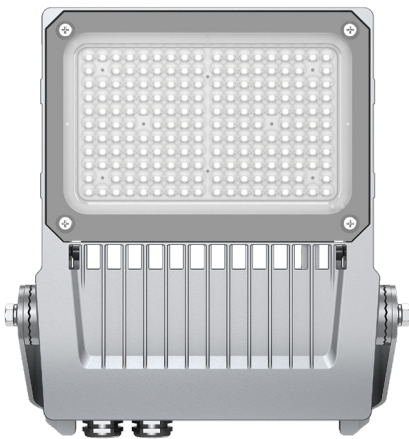

Scan QR Code Now For 2D/3D Drawings, IES Files, Spec Sheets & More



INVENTRONICS
DRIVING THE LIGHTING REVOLUTION




SPECIFICATIONS

Luminous Efficacy	150 lm/W
CCT	5000K Other Options Available
CRI	Ra70
Input Voltage	LV: 100-277Vac HV: 277-480Vac
IP Rating	IP66
Lens Degree	D125 Other Options Available
LED Driver	Sosen (LV) Inventronics (HV)
Chipset	Nichia
Operating Temp.	-30°C ~ +50°C / -22°F ~ +122°F
Warranty	5 Year Warranty
Certifications	UL, cUL, CE, RoHS

LUMENS	LED WATTAGE
45,000 lm	300W
36,000 lm	240W
30,000 lm	200W
22,500 lm	150W
15,000 lm	100W
7,500 lm	50W


MOUNTING OPTIONS

WALL MOUNT (STANDARD)

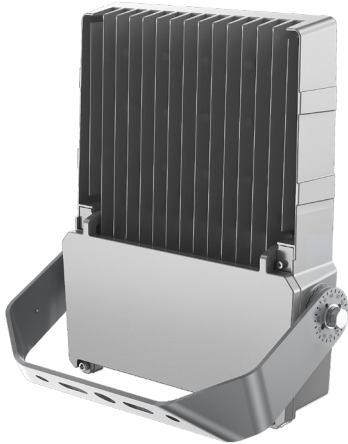

WM

POLE MOUNTING ADAPTOR

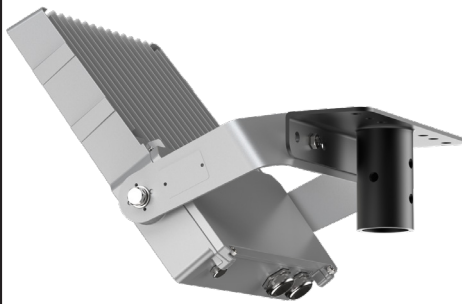

PM

BULLHORN MOUNT



BH

FIXTURE ORDERING MATRIX

Product Name	Wattage	Input Voltage	Lens Degree	CCT	Options
BE-FL27	50W	LV 100-277Vac (Standard)	D125 (55°x125°)	5000K	WM Wall Mount (Standard)
	100W				PM Pole Mount
	150W				BH Bullhorn Mount
	200W	HV 277-480Vac	Other Options Available	Other Options Available	PT Pigtail (Standard is 5') 6' Pigtail (Optional) 10' Pigtail (Optional)
	240W				
	300W				

Example: BE-FL27-50W-LV-D125-5000K-PM

CAPABILITIES



**Dual Cable Entry Options for
Daisy Chain Connection**

INDUSTRIAL LINEAR HIGH BAY



BE-LHB09

Linear high bay lighting for indoor or outdoor use that delivers symmetric lighting distribution that is suitable for high ceiling mounting. Smart control options include a photocell, PIR sensor, motion sensor, and an emergency backup.

Ideal for high bay lighting in aisles, workshops, and warehouses.

KEY FEATURES:

- **140 lm/W** Luminous Efficacy
- **Multiple Beam Angles** for Workshops & Warehouses
- **Anti-Glare Control**
- Modular Design for **Heat Dissipation**
- **Smart Control Options**
- **Mounting Options**

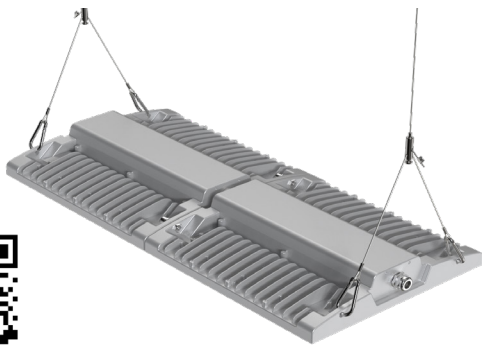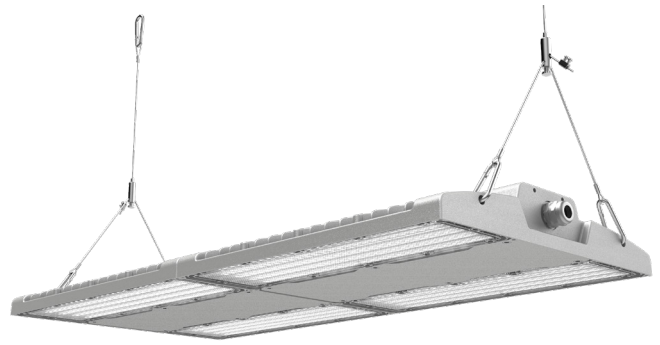

Scan QR Code Now For 2D/3D Drawings, IES Files, Spec Sheets & More



SPECIFICATIONS

Luminous Efficacy	140 lm/W
CCT	5000K Other Options Available
CRI	>Ra 80
Beam Angle	D100 (80°x100°) Other Options Available
Input Voltage	LV: 100-277Vac HV: 277-480Vac (Not 400W)
IP Rating	IP66
L70 Lifespan	>131,000 Hours
LED Driver	Sosen Emergency Battery (100W Only)
Chipset	Seoul
Operating Temp.	-30°C ~ +50°C / -22°F ~ +122°F
Warranty	5 Year Warranty
Certifications	DLC, UL, cUL


LUMENS	LED WATTAGE
56,000 lm	400W
42,000 lm	300W
28,000 lm	200W
21,000 lm	150W
14,000 lm	100W

MOUNTING OPTIONS


**SUSPENSION MOUNT
(STANDARD)**



NON-ADJUSTABLE CEILING MOUNT

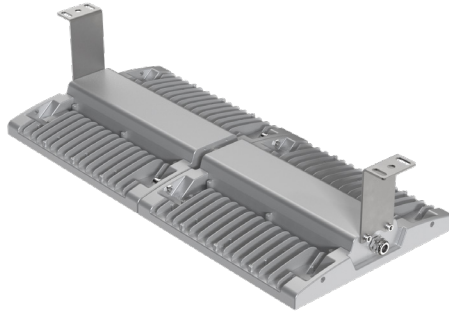

60° ADJUSTABLE CEILING MOUNT

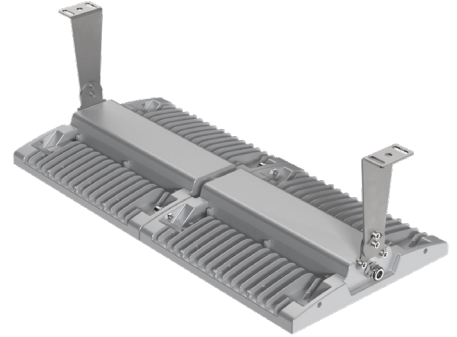


FIXTURE ORDERING MATRIX

Product Name	Wattage	Lens Degree	Input Voltage	CCT	Options
BE-LHB09	100W	D100 (80°x100°) Other Options Available	LV 100-277Vac HV 277-480Vac (Not 400W)	5000K Other Options Available	Suspension Suspension Mount (Standard)
	150W				Non-Adjustable Non-Adjustable Ceiling Mount
	200W				Adjustable 60° Adjustable Ceiling Mount
	300W				
	400W				BATT Emergency Battery (100W Only)

Example: BE-LHB09-100W-D100-LV-5000K-ADJUSTABLE

FIXTURE SIZING

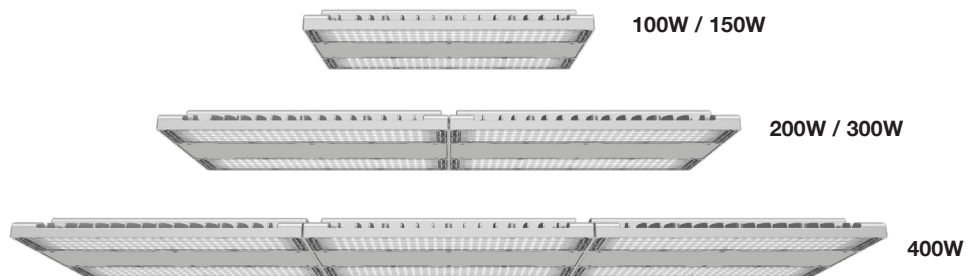

RECHARGEABLE WORK LIGHT

BE-RC-01

Our best-selling work light. The RC-01 runs off of a rechargeable battery. It comes with an adjustable polycarbonate stand for simple and easy directional adjustment and has magnetic feet to stay in place. It comes with a USB power bank charging facility for other devices that may need a quick charge while on site.

Ideal for any environment where extra lighting is required; construction sites, warehouses, garages, and more!

KEY FEATURES:

- Rechargeable
- Magnetic Feet
- Rubber Grip Handle
- Adjustable Polycarbonate Stand
- Power Settings: 3-Hours at 100% & 6-Hours at 50%
- USB Power Bank Charging Facility



Scan QR Code Now For 2D/3D Drawings, IES Files, Spec Sheets & More

SPECIFICATIONS

Wattage	30W
Lumens	3000lm
Operating Modes	100% / 50%
CCT	6500K
Lens	Anti-Glare
Focus	Area Lighting
Beam Range	25m
Run Time	100% 3 Hours / 50% 6 Hours
Operating Temp.	-5°C to +40°C
Measurements	215 x 192 x 285 mm
Weight	4.5 lbs
Shipping Weight	6 lbs
Shipping Dimensions	16 x 9 x 4"
IP Rating	IP54
Impact Resistance	1 m
Battery (Included)	7.4 6600 mAh Lithium-Ion
Certifications	CE, RoHS

EXTRA ACCESSORIES

Spare Battery
BE-RC-01-BATT

SPECS

7.4 V 6600 mAh Lithium-Ion Battery

LOCAL SALES REPRESENTATIVES

Since 2008, LED in Action has become the trusted brand by North America's heavy industrial plants. Our team of knowledgeable and experienced LED in Action local representatives are passionate about helping you find sustainable solutions for your costliest lighting challenges. If you would like more information on our lights, our pilot project program, or want to connect with one of our sales representatives, get in touch with us today!

GET IN TOUCH WITH YOUR LOCAL REGIONAL SALES REPRESENTATIVE TODAY:








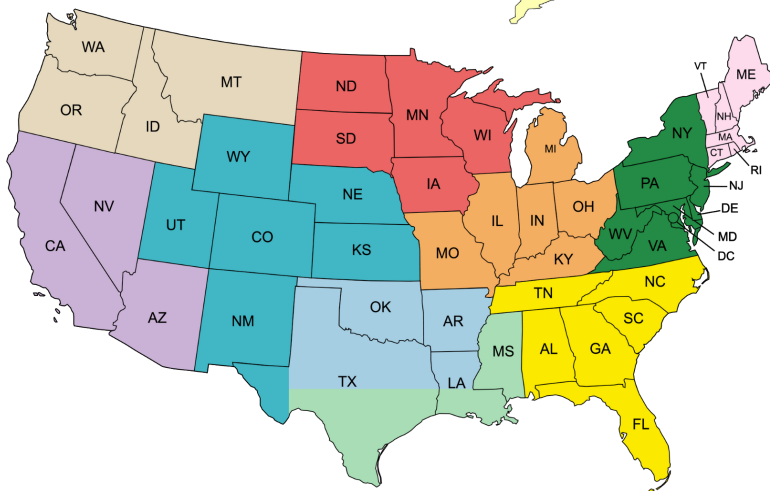
PHONE: 1-855-264-8600

EMAIL: info@ledinaction.com













CANADA

-  WESTERN CANADA
-  ONTARIO
-  ONTARIO SOUTH
-  ATLANTIC
-  QUEBEC



UNITED STATES

-  NORTH WEST
-  SOUTH WEST
-  MOUNTAIN PLAINS
-  MIDWEST NORTH
-  MIDWEST SOUTH
-  SOUTH CENTRAL
-  GULF COAST
-  SOUTH EAST
-  NORTH EAST
-  NEW ENGLAND

**We Sell Exclusively Through Your Distributor Of Choice
Our Sales Representatives Can Help You Get In Contact With Your Local Distributor**



1-855-264-8600



info@ledinaction.com

HIGH CEILINGS

Up to 96,000 LM



SUPERLUX
See Page 11

HIGH VOLTAGE

480V & 600V



SUPERLUX
See Page 13

HIGH TEMP

Up to 100°C/212°F



HIGH TEMP HAZLOC
See Page 31

TRUSTED BY THE HEAVY INDUSTRIAL SECTOR

www.LEDinAction.com

CANADA

Back to Earth Energy Inc.
1178 Bighorn Ave
Pincher Creek, AB T0K 1W0

UNITED STATES

LED in Action Inc.
910 S. Industrial Park Road
Shelby, MT 59474